

MARSH TACKY CARBON I.T. RETRACTABLE OUTRIGGER INSTRUCTIONS

STEP 2: INSTALLATION


YOUR OUTRIGGERS ARE SHIPPED WITH A COLOR CODED ADAPTER SLEEVE WHICH CORRESPONDS TO THE SPECIFIC MOUNTS ON YOUR BOAT. YOUR OUTRIGGERS ALSO COME PRE-DRILLED FOR THE PIN WHICH HOLDS THE OUTRIGGER IN ITS MOUNT. TO INSTALL YOUR OUTRIGGERS, SLIDE THE OUTRIGGERS IN UNTIL THEY BOTTOM OUT ON THE LIP OF THE ADAPTER SLEEVE AS SHOWN IN PHOTO 4. WITH YOUR OUTRIGGER POINTED STRAIGHT BACK IN THE STOWED POSITION, THE CLAMP LEVERS SHOULD POINT OUTWARD AND THE HALYARD GUIDES SHOULD POINT DOWN TOWARDS THE WATER AS SHOWN IN THE DIAGRAM BELOW AND IN PHOTO 3. IF YOUR HALYARD ENTRY POINTS DOWN AND YOUR CLAMPS DO NOT POINT OUTWARD, SIMPLY SWITCH THE OUTRIGGER TO THE OTHER SIDE OF THE BOAT.



PHOTO 3 - IF INSTALLED CORRECTLY, YOUR OUTRIGGERS SHOULD LOOK LIKE THIS, CLAMP LEVERS SHOULD OPEN DOWNWARD AND OUTBOARD



PHOTO 4

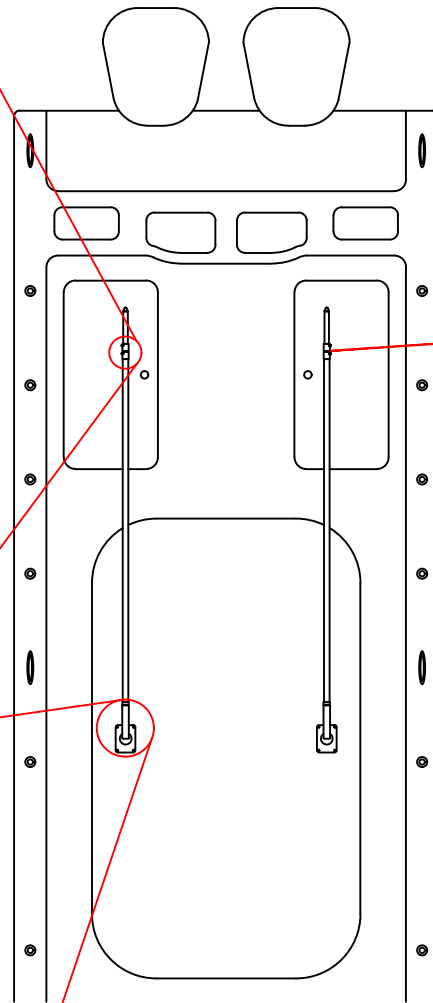

CLAMP LEVERS POINT
OUTWARD AND
HALYARD GUIDES POINT
DOWN